

LED WALL LIGHT - SMALL (XAWS) AND MEDIUM (XAWM)



U.S. and international patents pending

EXPECTED LIFE - Minimum 60,000 hours to 100,000 hours depending upon the ambient temperature of the installation location. See LSI web site for specific guidance.

LEDS - Select high-brightness LEDs. 5750°K color temperature (nominal).

DISTRIBUTION/PERFORMANCE - Types 2 and 3. Exceptional uniformity with full cutoff creates bright environment at lower light levels.

HOUSING - Housing is die-formed aluminum. Weather-tight housing contains factory prewired driver and field connections. Wiring access door is located underneath and utilizes tool-less thumbscrew fastener.

OPTICAL UNIT - Lens is clear, flat tempered glass, sealed to aluminum optics housing to create an IP65 rated, sealed optical unit.

MOUNTING - Tapered rear design allows fixtures to be easily mounted in a junction box using a simple wall plate (supplied).

ELECTRICAL - Universal voltage power supply 120-277 VAC, (50/60 Hz) input. Also available in 347V and 480V. Supply voltage must be specified for use with optional button-type photocells. PCI is available in 120, 208, 240, 277, or 347 volt.

DRIVER - State-of-the-art driver technology designed specifically for LSI LED light sources provides unsurpassed system efficiency. Components are fully encased in potting material for moisture resistance.

OPERATING TEMPERATURE - -40°C to +50°C (-40°F to +122°F).

FINISH - Fixtures are finished with LSI's DuraGrip[®] polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling, and is guaranteed for five full years. Standard colors include bronze, black, platinum plus, buff, graphite, satin verde green, metallic silver and white.

WARRANTY - LSI LED fixtures carry a limited 5-year warranty.

PHOTOMETRICS - Application layouts are available upon request. Contact LSI Applications Group at lighting.apps@lsi-industries.com

SHIPPING WEIGHT - 21.0 lbs (9.5 kg) for small and 27.0 lbs (12.7 kg) for medium

LISTING - Listed to U.S. and Canadian safety standards. Suitable for wet locations.

LIGHT OUTPUT		
Fixture	Distribution	Lumens (Nominal)
XAWS	Type 2	5103
	Type 3	4355
Input Power of 70 watts		
XAWM	Type 2	9900
	Type 3	9400
Input Power of 137 watts		



Suitable for wet locations

IP67

LED WALL LIGHT - SMALL (XAWS) AND MEDIUM (XAWM)




LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **XAWS 3 LED 63 CW UE MSV PCI277**


Prefix	Distribution	Light Source	# of LEDs	LED Color Temperature	Line Voltage	Luminaire Finish	Options
XAWS - LED Wall Mount Small	2 - Type 2 3 - Type 3	LED	63	CW - Cool White (5750°K nom.)	UE - Universal Voltage (120-277) 347 480	BLK - Black BRZ - Bronze BUF - Buff GPT - Graphite MSV - Metallic Silver PLP - Platinum Plus SVG - Satin Verde Green WHT - White	Button Type Photocells PCI 120 - 120v PCI 208 - 208v PCI 240 - 240v PCI 277 - 277v PCI 347 - 347v
XAWM - LED Wall Mount Medium	2 - Type 2 3 - Type 3		119				

DIMENSIONS


Small

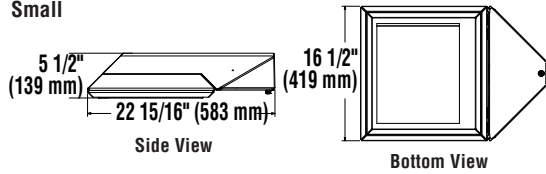

Medium

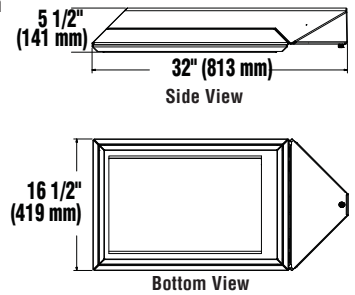

Wall Bracket



10/28/09

© 2009 LSI INDUSTRIES INC.

Project Name _____ Fixture Type _____
 Catalog # _____

