


FILL-RITE®

Contractors & Farmers Choose the

FILL-QUIK™ **High-Flow Pump**



The Fill-Quik™ pump kit is ready to go right out of the box – it comes with everything you need. And, its high-flow design means that you spend less time fueling and more time working!

Fill-Quik Features and Benefits

Built to Last - Cast iron pump housing and sliding vanes adjust for wear throughout the pump life, ensuring reliable, consistent operation.

High Flow Rate - Pumps 100 gallons (376 liters) in less than 6 minutes. Rate can be further improved by removing the filter and using Fill-Rite's Top Gun manual nozzle.

High-Flow 30-Micron Filter Included - Minimizes dirty fuel problems and is an expensive option not furnished with other systems.

All 1" Pipe Nipples & Elbows Provided - Ensures a compact and easy installation. This hardware is also not furnished with other systems.

Only 49 lbs. - Weight is 30% less than comparable products, which cuts down on tank thread and plumbing damage when driving over rough terrain.

Low 22 Amp Draw - 35% less than comparable products, which increases your battery life.


High-Flow Automatic Nozzle - Includes a 1" spout and hang-up hook for added convenience.

20 ft. x 1" Diameter Hose - Long enough to reach fuel tanks while delivering the highest possible flow rate.

25 ft. Heavy Duty Industrial Battery Cable - Soldered to battery clamps to reduce voltage drop and increase durability.

Best Value - Fill-Quik pricing is over 20% below comparable products, yet includes the filter and plumbing.

Proven Durability - A full two-year warranty guarantees your satisfaction.

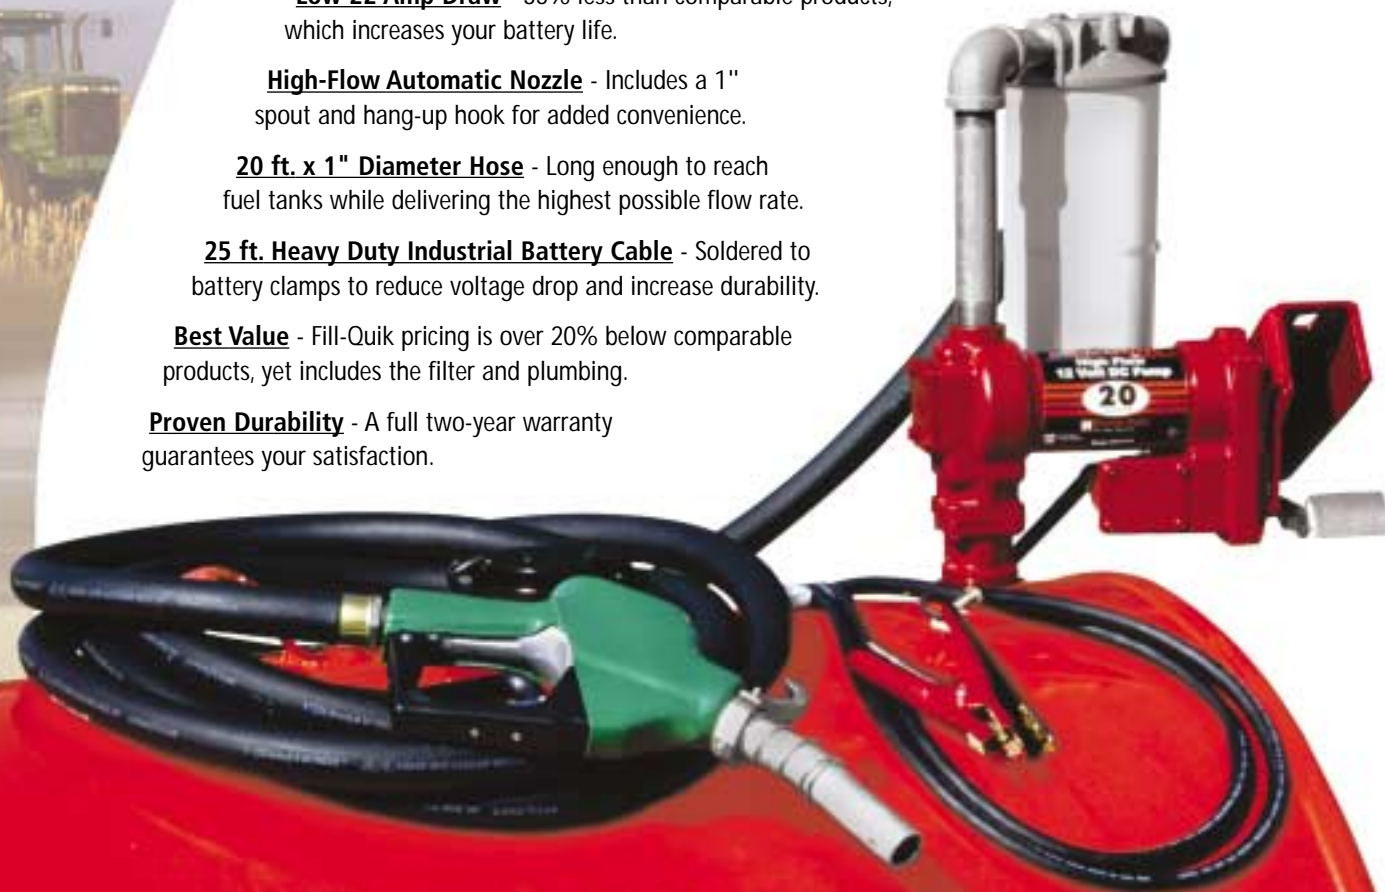

* 376 liters

Fill-Quik Features and Specifications

Model Number – FR4210DBFQ

Warranty	2 years
Maximum flow with automatic nozzle*	17 GPM (64 LPM)
Maximum flow with manual nozzle*	20 GPM (76 LPM)
Pump housing	Cast iron
Rotor	Sintered bronze and iron
Pump vanes	(5) Machined carbon
Internal bypass valve	Yes
Inlet strainer	Yes – steel screen
Nozzle holder	Yes
Security	Pump can be padlocked
Motor HP	1/4 HP, explosion proof
Motor voltage	12 volts DC, 24 VDC optional
Motor amperage	22 amps
Thermal overload protection	Yes
Duty cycle	30 minutes
Motor approvals	UL, cUL
Pump inlet	1" NPT
Pump outlet	1" NPT
Threaded tank adapter	2" NPT

*Expect a reduction in flow rate (GPM) whenever the nozzle outlet is higher than the pump outlet.

Applications

For fast fueling applications for gasoline, diesel fuel, and kerosene where no AC power is available.

Box Contents

Series 4200, high-flow DC pump
 20 ft. (6.1 m) x 1" diameter fuel hose with static wire
 High-flow automatic nozzle with 1" spout and 4200F9111 hang-up hook
 30-micron high-flow filter with 1" metal pipe fittings to install at pump outlet
 1" telescoping steel suction pipe
 25 ft. (7.6 m) 10 ga. battery cable with heavy duty clamps and cable restraint
 Teflon® tape
 Owner's manual with installation instructions

Options

Model Number

High-flow meter kit	901MK4200
Manual nozzle with swivel and 1" spout	N100UMN11
24 volt DC version of Fill-Quik	FR4410DBFQ

Discover Fill-Rite's Complete Line of Accessories

As the industry leader in utility fuel transfer pumps, Fill-Rite is best equipped to design accessory products that deliver optimum system performance. Ask your Fill-Rite supplier today for the complete Fill-Rite accessories solution that best meets your needs.



Hoses

12-, 14- and 20-foot Lengths
 3/4" and 1" Connections
 Complete with static wire and spring guards



Nozzles

Automatic or Manual
 UL and Non-UL
 3/4" and 1" Sizes



Filters

Flow rates up to 40 GPM
 Hydrosorb or Particulate
 Metal Canister or Clear Bowl



Battery Cables

Vent Caps
 Suction Pipes
 (Telescoping Steel)

For product information, call us at 800-634-2695 or visit us online at www.fillrite.com

TUTHILL
 Transfer Systems | United States
 8825 Aviation Drive
 Fort Wayne, Indiana USA 46809
 Tel 260 747-7524 Fax 260 747-3159
www.tuthill.com

TUTHILL
 Transfer Systems | Europe
 Parc Industriel Wavre Nord-Avenue Vésale 30
 B-1300 Wavre Belgium
 Tel 32-10/22.83.34 Fax 32-10/22/83.38
www.tuthill.com

TUTHILL
 CORPORATION | Latin America
 1320 South Dixie Highway Suite 1060
 Coral Gables, Florida USA 33146
 Tel 305 740-3381 Fax 305 740-9328
www.tuthill.com