

DRY-BREAK II™ 2-INCH

Emco Wheaton DRY-BREAK™ Couplers and Adapters are used anywhere spill-free fluid transfer is required.

COUPLER



- Cannot be opened until connected to adapter or disconnected until lever is moved to closed position thus eliminating accidental spillage
- Product loss on disconnect virtually eliminated
- Stainless version available with straight ball-bearing swivel for kink-free hose connection
- Aluminum version available with straight or 90° integrated ball-bearing swivel for kink-free hose connection
- Easily serviced in the field using the **Emco Wheaton Repair Kit Program**
- Mates with all existing Emco Wheaton 1.5" and 2" inlet adapters
- Also available in unique 4-notch pattern

ADAPTER



- Enhanced poppet design allows for better flow characteristics in either direction
- Rear-entry design allows for easy field servicing
- One-piece poppet means fewer components for service
- Mates with all existing Emco Wheaton 1.5" and 2" inlet couplers
- Also available in unique 4-notch pattern

ACCESSORIES

Dust Cap for Adapter




Adapter Opener




Dust Plug for Coupler



TECHNICAL SPECIFICATIONS

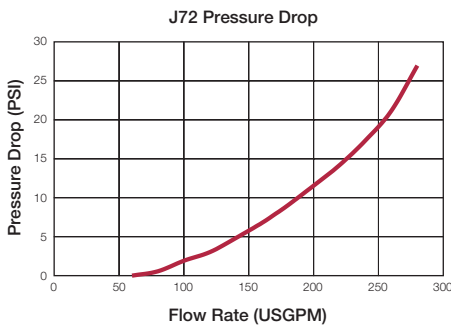

Maximum Working Pressure: 85 psi

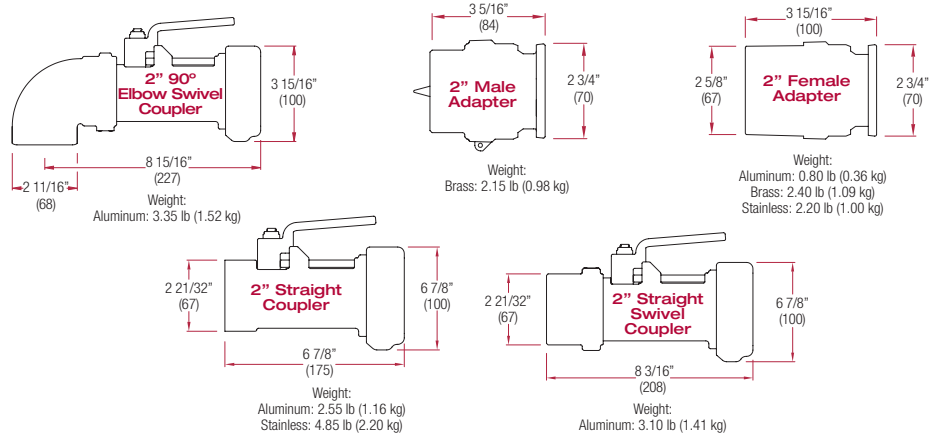

TO ORDER 2-INCH PRODUCTS

Configure your part number as shown below.
 Sample Part Number:

J 7 2 C - S V N 0 - B 0 0 1

Type	Body Material	Seals	Inlet	Swivel	Rev.	Special Features
C=Coupler	A=Aluminum	V=Viton	N=Female NPT	0=Straight (No Swivel)	A	001=90° Handle
A=Adapter	B=Brass	B=Buna	M=Male NPT	1=Straight with Swivel	B	002=SST Trim
	S=Stainless Steel	P=Perfluoroelastomer (Chemraz)	I=ISO 228 Parallel	2=90° with Swivel	C	003=Selective (3-pin)
					D	004=with dust cap
					etc.	008=Selective (2-pin)
						010=4-Notch Version

Note: for 1.5" inlet, use J79 instead of J72.

CRN available for all provinces and territories.

Perfluoroelastomer (Chemraz) -20°F to 450°F (-29°C to 232°C)
Buna -40°F to 225°F (-40°C to 107°C)
Viton 5°F to 225°F (-15°C to 204°C)

EMCOWHEATON

A Gardner Denver Product

2480 Bristol Circle, Oakville, Ontario CANADA L6H 5S1

Tel: 905.829.8619 Fax: 905.829.8620

E-mail: sales@emcowheatoncanada.com

www.emcowheaton.com

Better by Design