





CHARACTERISTIC CURVES
Models: TX1.5

Page Number	201-021
Effective	Oct 2001
Replaces	201/17 Dec 95
Section	201

FLOW AT 50 PSI (3.45 Bar)

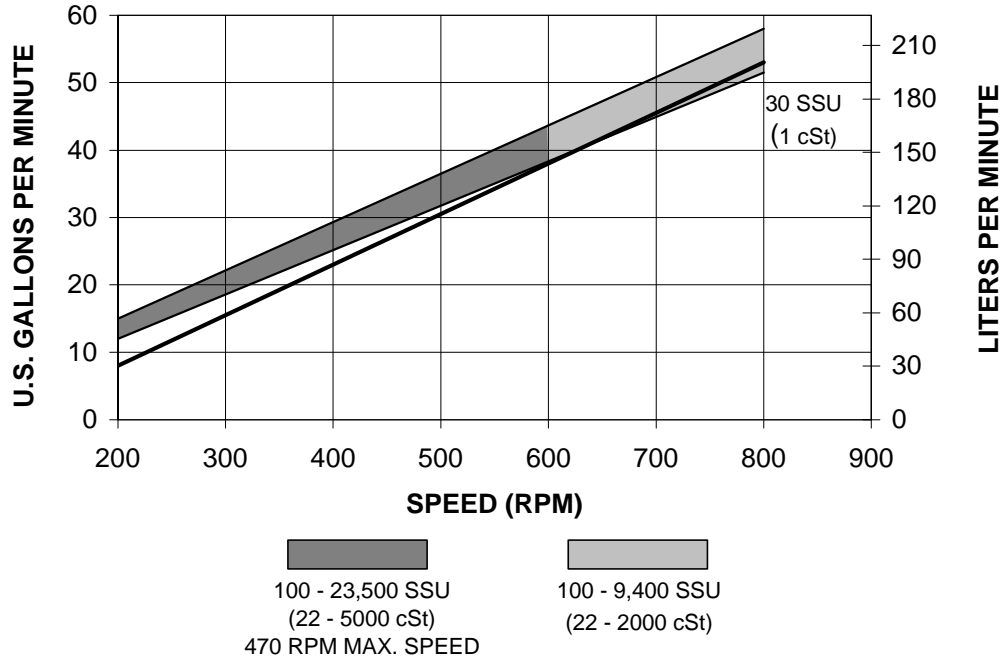


TORQUE REQUIRED AT 50 PSI (3.45 Bar)

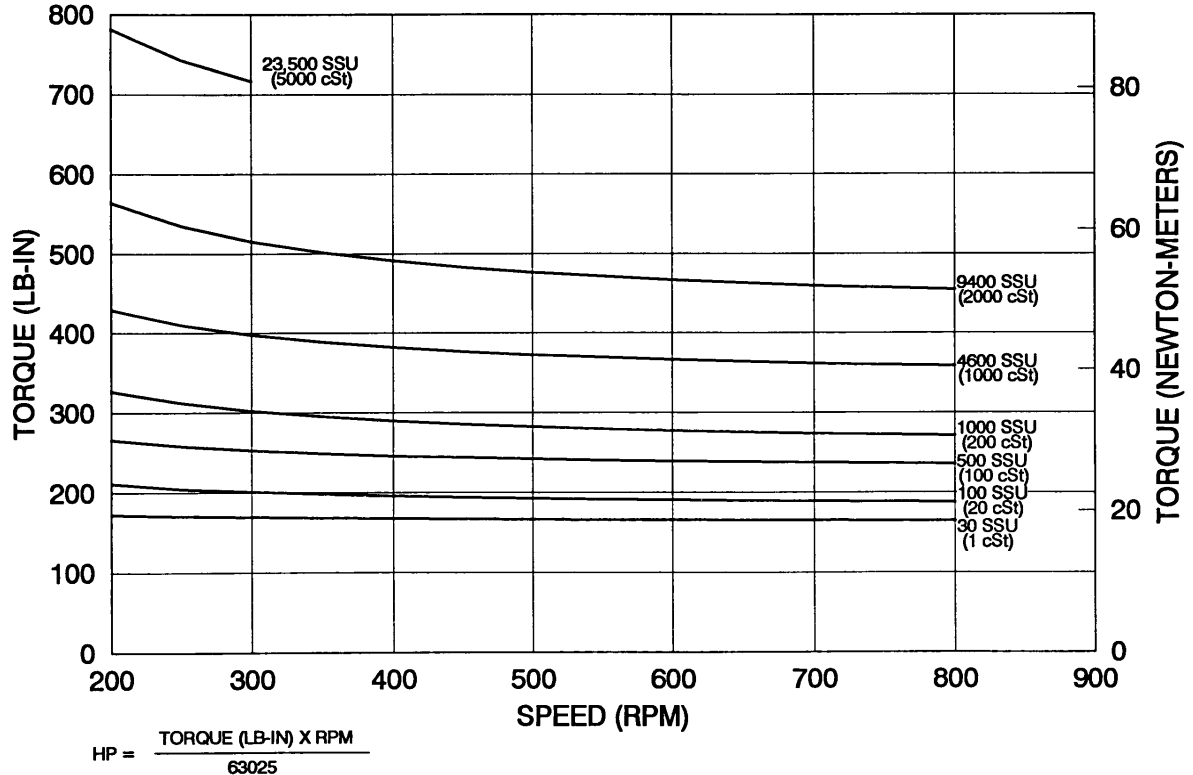

$$HP = \frac{\text{TORQUE (LB-IN)} \times \text{RPM}}{63025}$$

CHARACTERISTIC CURVES

Models: TX1.5

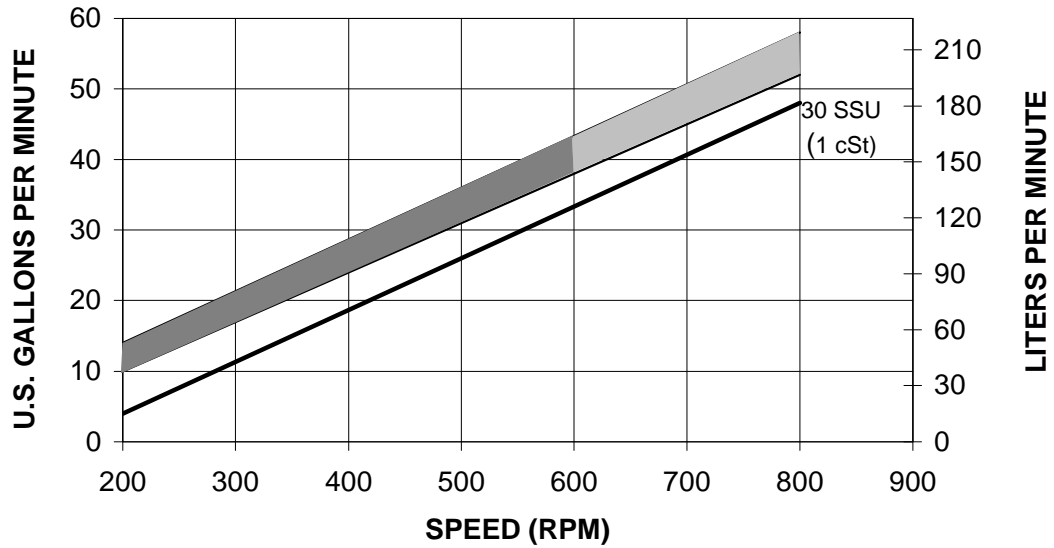


100 - 23,500 SSU
 (22 - 5000 cSt)
 470 RPM MAX. SPEED

100 - 9,400 SSU
 (22 - 2000 cSt)

FLOW AT 125 PSI (8.62 Bar)

TORQUE REQUIRED AT 125 PSI (8.62 Bar)

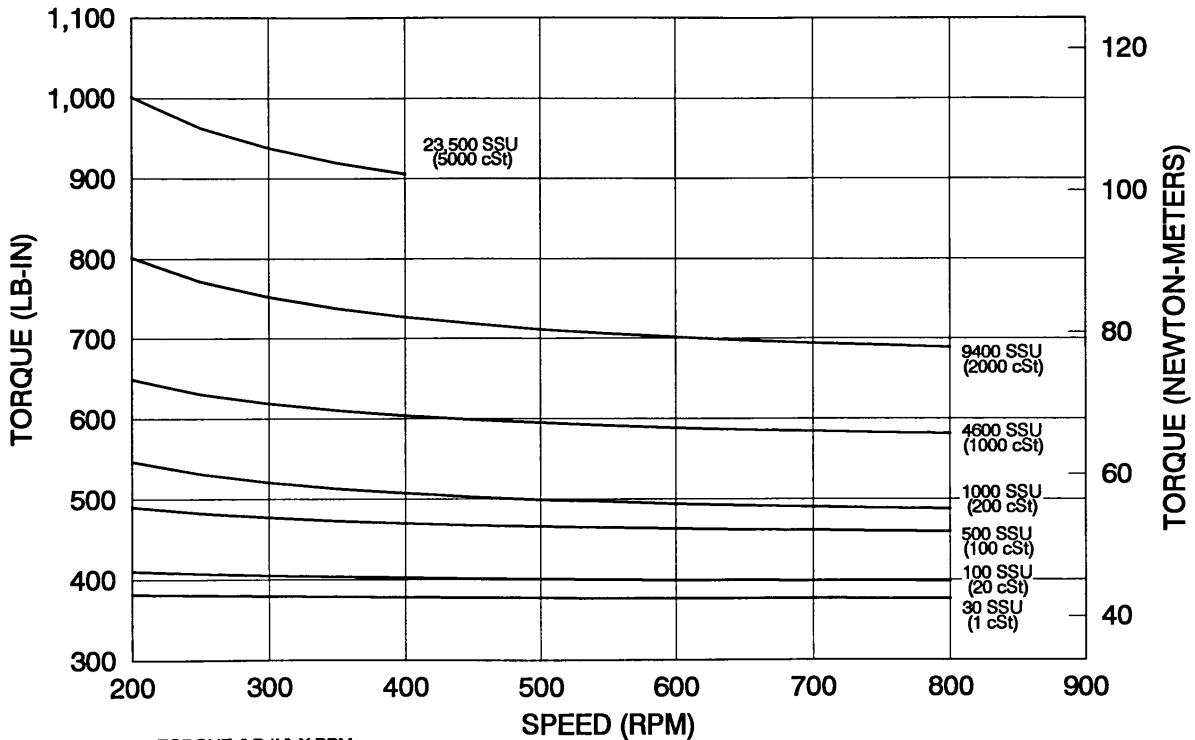

$$HP = \frac{\text{TORQUE (LB-IN)} \times \text{RPM}}{63025}$$

