

December-06-13 9:58 AM


**Subject: HCR2 Card Reader Installation Grounding**

**Attn: NEE Service Managers and DSS Subcontractors**

Please ensure you are following the GVR installation instructions for installing the HCR2 card reader. Make sure you ground the HCR2 mounting bracket with the supplied ground wire back to the main frame. **This applies for ALL customers as the HCR bezel is conductive.**

- 7 Route the Bezel Ground Cable around the door hinge from the upper left mounting screw, securing it to the U-channel in the main dispenser using the supplied M00417B001 Screw.

**Figure 4: Bezel Ground Cable**

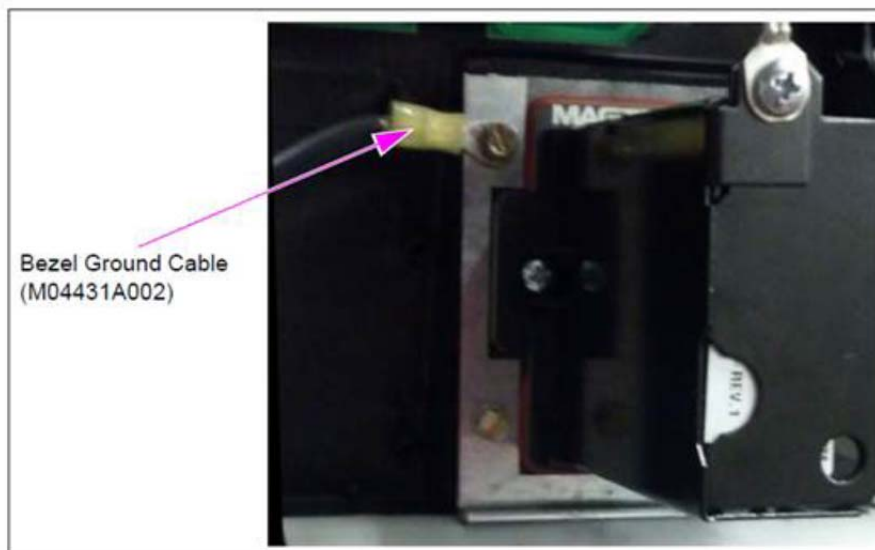

Thank you,  
Nama Namasivayam