

WHITE-VIOLET HEAD POWER

BLACK LIGHT POWER

BLACK 14GA MOTOR POWER

BLACK 14GA MOTOR POWER

WHITE LIGHT COMMON

WHITE-ORANGE COMMON

WHITE-BLUE SIDE 1

WHITE-BLUE SIDE 2

RED SIDE 1

RED SIDE 2

RED SIDE 2

RED SIDE 1

WHITE-BLUE SIDE 2

WHITE-BLUE SIDE 1

BROWN 1 DATA+ OR PULSE SIDE 1

WHITE-GREY 1 DATA - OR PULSER COMMON SIDE 1

BROWN 2 PULSE SIDE 2

WHITE-GREY 2 PULSER COMMON SIDE 2

OPTIONAL FLOW SWITCH


-----COMMON BLACK

-----N.O. BLUE

-----N.C. RED

NOTE THE HEAD POWER FOR ALL UNITS MUST BE ON THE SAME PHASE WIRING IS TO BE MINIMUM 14 GAUGE STRANDED OR AS PER LOCAL HYDRO CODE

----- CURRENT SENSE CONNECTION FOR CARD LOCK USE

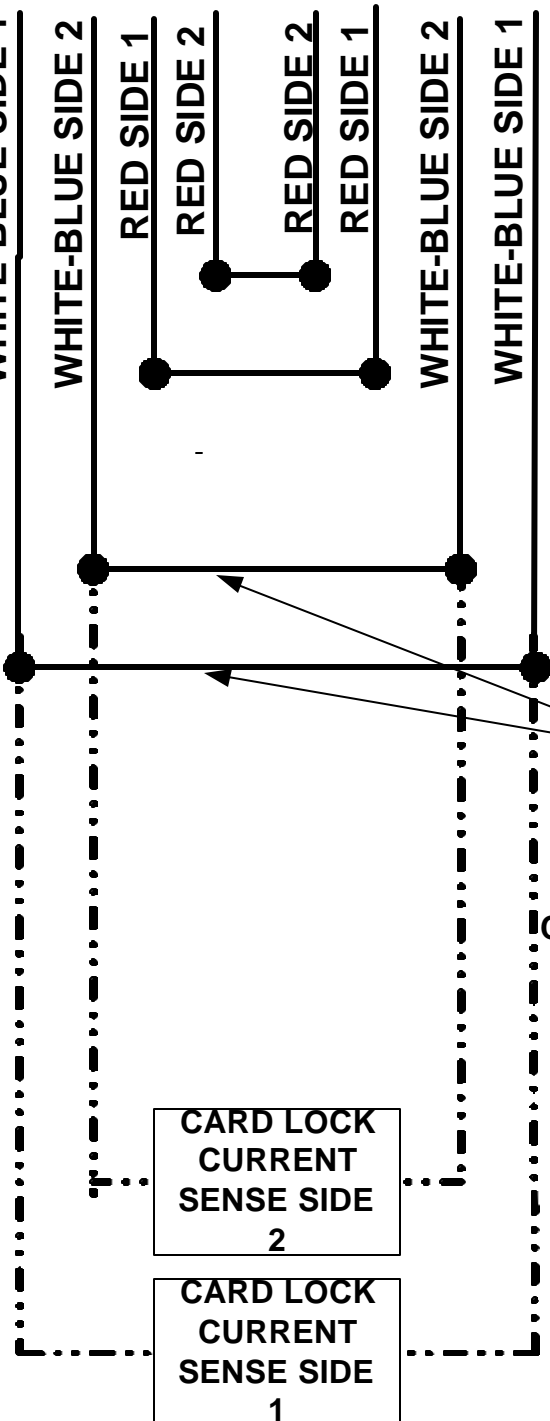

BREAK CONNECTIONS FOR CARD LOCK USE

OPTIONAL FLOW SWITCH

-----COMMON BLACK

-----N.O. BLUE

-----N.C. RED

CONNECTIONS MARKED FOR SIDE 2 ARE NOT CONNECTED ON SINGLE HOSE UNITS

JUNCTION BOX CONNECTIONS FOR G2001P, G2007P/R, G2002P AND G2007P